



Roasted Peat

PRODUCT FACT SHEET


Introduction

The Hurford Roasted process metamorphoses the natural colour of hardwood to create a deep rich tone that penetrates through the wood. Hurford Roasted is a high temperature thermally modified hardwood that uses a custom designed heating program to alter the woods molecular structure. This has many benefits that include locking in the colour, increasing the durability and limiting movement to a fraction of normal kiln dried flooring.

Roasted Peat

Grade Description

STANDARD GRADE (Medium Feature): Flooring in this grade will be moderately featured. Gum veins, gum pockets, insect trails, burls and borer holes are some of the characteristics that will be more prevalent in Standard Grade.

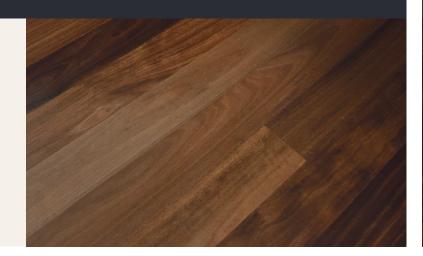

Specifications

ITEM	DESCRIPTION			
Hardwood flooring	Hurford Roasted	High temperature thermally modified hardwood		
Colour	Peat	Earth tones to dark chocolate		
Size	Width x Thickness	83mm x 13.5mm 128mm x 13.5mm 178mm x 13.5mm		
Profile	Tongue & groove end match	Precision milled offset tongue for easy secret nailing		
Wear layer	5.5mm			
Milling standard	Australian Standard 2796.1			
Hardness	Janka 9.5			
Colour penetration	100% through the board			
Grade	Prestige	Light to medium featured, with a range of gum veins, insect trails and other natural characteristics		
Resource	Solid Australian Hardwood	North Coast NSW Hardwood		
Resource source	NSW State Forest NSW Private Native Forest	Australian Forestry Standards Chain of Custody (AS4707 – 2006) Hurford Forestry Management		
Product Coating	Hard wax oil			

Product Matrix

PRODUCT	WIDTHS	THICKNESS	PLYWOOD	PARTICLEBOARD	BATTENS	BEARERS & JOIST
Ultral0	86mm	10mm, 12mm	\checkmark	\checkmark		
OVERLAY	83mm	14mm	✓	✓		
FOURTEEN	130mm, 180mm	14mm	✓	\checkmark		
TRADITIONAL FLOORING	80mm, 130mm	19mm	✓	✓	✓	√
WIDEBOARD FLOORING	180mm	21mm	✓	✓	✓	✓

Boards wider than 80mm in traditional flooring should be top nailed as per AS1684.

